



DENOCCIOLATRICE A RULLI

DENOCCHIOLATRICE A RULLI

La "DENOCCHIOLATRICE A RULLI" è una macchina specifica per denocciolare frutta matura a temperatura ambiente tipo albicocche, pesche e prugne.

Per la denocciolatrice di ciliegie o di prugne con noccioli di piccole dimensioni, la macchina deve essere corredata di un rullo e un blocco estrattori supplementare da sostituire in fase di lavorazione.

La produzione di questa macchina può andare da un minimo di 4 t/ora ad un massimo di 20 t/ora, possono pertanto essere realizzate tutte le macchine intermedie (vedi alcuni modelli riportati sotto)

ROLLER-OPERATED STONE REMOVER




ROLLER-OPERATED STONE REMOVER

The "ROLLER-OPERATED STONE REMOVER" is a machine specifically designed to remove stones from ripe fruit, such as apricots, peaches and plums, at ambient temperature.

In order to remove the stones from cherries or small plums the machine must be fitted with a supplementary extractor unit and roller, to be replaced during the working phases, so that the machine can deal with the smaller sized stones.

The production rate of this machine can go from a minimum of 4 t./hour to a maximum of 20 t./hour. Naturally, machines with intermediate production rates can also be built (see some of the models indicated below).

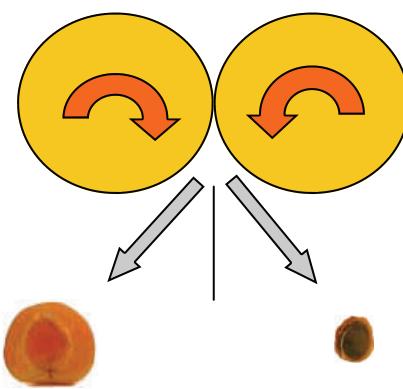

Modello Model	Potenza Kw Power Kw	Produttività T/h Productivity T/h	Peso Kg Weight Kg
40S	3	4	480
55S	4,1	6	580
80S	5,6	8	580
100S	7,5	10	820
125S	7,5	12,5	1.160
150S	9,3	15	1.390
200S	11,2	20	2.040